

MODEL EL-1-CO**PTAC GRILLE-CORE ONLY****APPLICATION AND DESIGN:**

The EL-1-CO is generally used as a decorative louver that is installed with PTAC applications. It consist of a Core Only that mounts directly to the PTAC. It comes with #10 x 1" mounting bolts for installations. The free area is approximately 65% which provides minimal resistance to airflow. This grille is available with an optional split airflow design which allows discharge and return air to flow through the same grille simultaneously.


STANDARD CONSTRUCTION:

Blade: 0.064" [1.63mm] 6063-T5 Extruded Aluminum placed on 0.775" [19.69mm] centers (available in 30° or 42°)



Blade Brace: 0.064" [1.63mm] 6063-T5 Extruded Aluminum

Finish: Mill Aluminum

Max Single Section: 120"w x 84"h [3048mm x 2134mm]
(Multi-section Units Available)

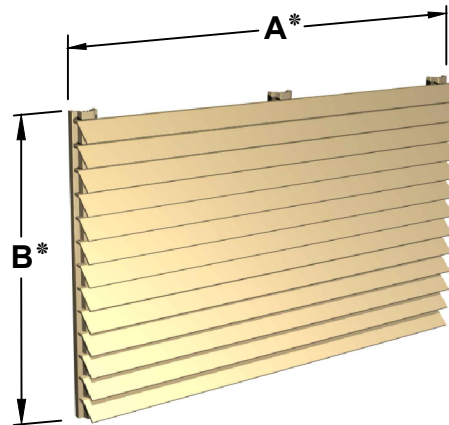


EL-1-CO w/30° Blades Shown

Split Airflow Option**Design #1****Design #2****OPTIONS:**

- ☐ Blade Degree: ☐ 30°, ☐ 42°
- ☐ Insect Screen (Other Screens Available, See Screen Page)
- ☐ Blade Direction: ☐ Facing Up, ☐ Facing Down
- ☐ Split Airflow Design: ☐ Design #1, ☐ Design #2
- ☐ Return Height: _____"

AVAILABLE FINISHES:

- ☐ Durable Polyester (AAMA 2604)
- ☐ 70% PVDF Fluoropolymer (AAMA 2605)
- ☐ Yellow Primer
- ☐ Clear Anodize
- ☐ Dark Bronze Anodize

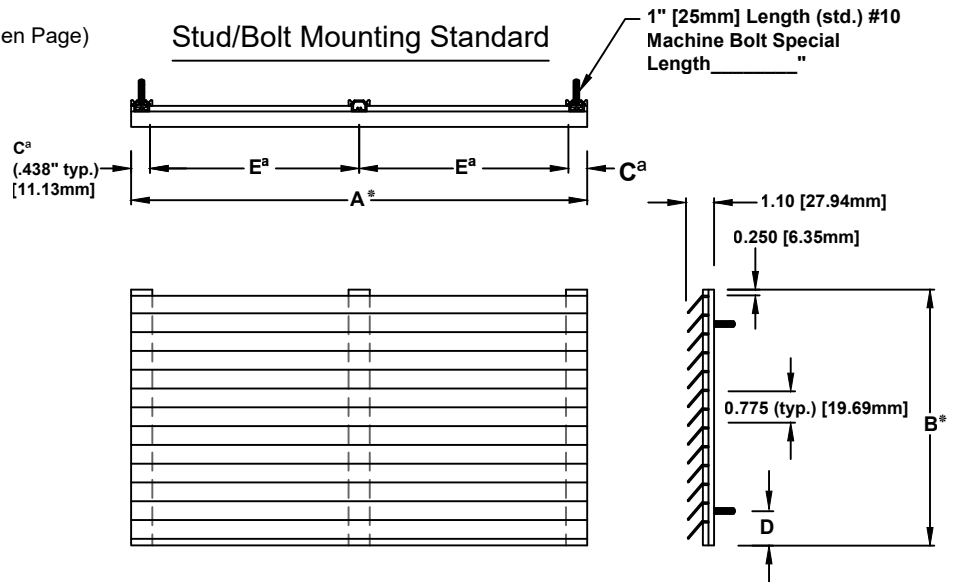

Qty.	"A" (width)	"B" (height)	"C ^a " (specify)	"D" (specify)	Tag

^a "E" Not to Exceed 16" [406mm]

*Width and Height dimensions are approximately 1/4" [6.35mm] under listed size.

**MODEL EL-1-CO (PTAC GRILLE-CORE ONLY)**

DRAWN BY:	DATE:	REV. DATE:	REV. NO.	DWG. NO.:
CLJ	5-4-10	3-9-26	4	A-42

Due to continuing research, S&P reserves the right to change specifications without notice.